



Model: NR-96 NR-72

Struction: Moving Coil, Moving Iron and Rectifier


Class: 1.5



NR96




NR72



NR72

尺寸 Dimensions:

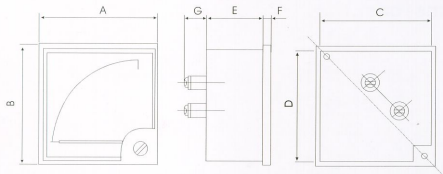

Size	A	B	C	D	E	F	G	For hole
NR-96	96	96	90	90	33.5	5	11	90.5x90.5
NR-72	72	72	67	67	33.5	5	11	67.5x67.5

主要技术参数 Main technical parameter:

名称Name	规格	Specifications	备注	Remarks
直流电流表DC Ammeter	30 μ A-1000 μ A	1-1000mA 1-15A	直通式	Direct connection
	10-1000A	1K-10KA	外附分流器	With Ext.Shunt
直流电压表DC Voltmeter	40-1000mV	1-1000V	直通式	Direct connection
	1K-10KV		外附定值电阻	With Ext.Resistor
交流电流表AC Ammeter	40-1000mA	1-50A	直通式	Direct connection
	5-1000A	1K-10KA	外附互感器	With Ext.CT
交流电压表AC Voltmeter	40-1000mV	1-1000V	直通式	Direct connection
	1K-380KV		外附互感器	With Ext.CT
频率表Frequency Meter	电压: 50-380V 频率: 45-55Hz 45-65Hz 55-65Hz			
功率因素表Power Factor Meter	电压: 50-380V 规格: 0.5cap-1-0.5ind 0.3cap-1-0.7ind 0.4cap-1-0.4ind 0.7cap-1-0.3ind		适合单相、三相三线平衡负载电路。	Suitable for 1P or 3P Φ Circuit.
功率表Power Meter	电压: 50-380V 电流: 0.2-5A		配电流或电压互感器	With Current or Voltage Transformer