


B/N	Suplr's model No	Picture	DATA.	MATERIAL
736520	C5		Spring DIA:Φ3 Length/Trail distance□130/98mm	Brass foundry
736473 / 736481	15#		Thickness of board:0.7mm Spring DIA:Φ2.5 Length/Trail distance□104/76mm	Zinc plated
736503 / 736490	W1		Thickness of board:0.7 Spring DIA:Φ3.2 Length/Trail distance□139/106mm	Zinc plated and Jaw is brass foundry
736546 / 736538	W2		Thickness of board:0.7 Spring DIA:Φ3.2 Length/Trail distance□152.5/125mm	Zinc plated and Jaw is brass foundry
736554 / 736562	33#		Thickness of board:0.5 Spring DIA:Φ1 Length/Trail distance□51.5/16.5mm	Nickel Plated
736597 / 73600	31#		Thickness of board:1.2 Spring DIA:Φ1.6 Length/Trail distance□107/37.5mm	Nickel Plated
736589 / 736570	32#		Thickness of board:0.7 Spring DIA:Φ1.4 Length/Trail distance□79/26mm	Nickel Plated

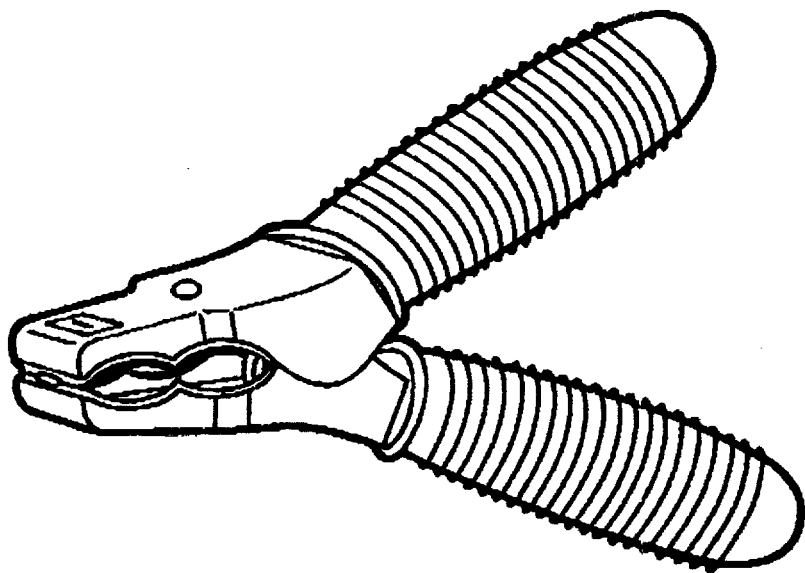

**Ladezange      H80 /  
H80 vollisoliert**

- Stahlblech gelb verzinkt
- Isolierkappen aus Escorene Ultra EVA bei den vollisolierten Ladezangen,  
Griffe aus PVC,  
Farben rot(+) und schwarz(-)
- Kabelanschluß bis 10 mm<sup>2</sup>,  
anquetschbar oder mit Schraube 4 mm und Mutter,  
mit Zugentlastung
- belastbar bis 80 Ampere
- Länge 125 mm
- Gewicht 0,060 kg